

Model: C175 D5e (QSB7G5)
Frequency: 50
Fuel Type: Diesel

» Generator set data sheet



Our energy working for you.™

Spec sheet:	SS22-CPGK
Noise data sheet (Open/enclosed):	ND50-OS550 / ND50-CS550
Airflow data sheet:	AF50-550
Derate data sheet (Open/enclosed):	DD50-OS550 / DD50-CS550
Transient data sheet:	TD50-550

Fuel consumption	Standby				Prime			
	kVA (kW)				kVA (kW)			
Ratings	175 (140)				160 (128)			
Load	1/4	1/2	3/4	Full	1/4	1/2	3/4	Full
gph	3.0	5.4	7.3	9.1	2.7	5.0	6.8	8.4
L/hr	13.62	24.50	33.26	41.25	12.25	22.72	31.06	38.38

Engine		Standby rating	Prime rating
Engine manufacturer	Cummins		
Engine model	QSB7G5		
Configuration	4 Cycle; In-line; 6 Cylinder Diesel		
Aspiration	Turbo Charged and Charge Air Cooled		
Gross engine power output, kWm	213		182
BMEP at set rated load, kPa	2537		2172
Bore, mm	107		
Stroke, mm	124		
Rated speed, rpm	1500		
Piston speed, m/s	6.2		
Compression ratio	17.2:1		
Lube oil capacity, L	15.1-17.4		
Overspeed limit, rpm	1500+15%		
Regenerative power, kW	14		
Governor type	Electronic		
Starting voltage	12V Volts DC		

Fuel flow	
Maximum fuel flow, L/hr	106
Maximum fuel inlet restriction, mm Hg	127-254
Maximum fuel inlet temperature (°C)	71

Air	
Combustion air, m³/min	12.72
Maximum air cleaner restriction, kPa	3.7-6.2

Exhaust	Standby rating	Prime rating
Exhaust gas flow at set rated load, m ³ /min	35.82	34.14
Exhaust gas temperature, °C	561	544
Maximum exhaust back pressure, kPa	10.2	

Standard set-mounted radiator cooling		
Ambient design, °C	50	
Fan load, KW _m	6.8	
Coolant capacity (with radiator), L	30.2	
Cooling system air flow, m3/sec @ 12.7mmH2O	5.91	
Total heat rejection, BTU/min	6516	5825
Maximum cooling air flow static restriction mmH2O	8.12	

Open set derating factors kVA (kW)

Note: Standard open genset options running at 400V, 150m above sea level. For enclosed product derates, please refer to datasheet - DD50-CS550.

	27 °C	40 °C	45 °C	50 °C	55 °C
Standby	175 (140)	170 (136)	164.9 (131.9)	159.8 (127.8)	154.8 (123.8)
Prime	160 (128)	156 (124.8)	152.3 (121.8)	146.6 (117.3)	141.9 (113.5)


Weights*	Open	Enclosed
Unit dry weight kgs	1546	2557
Unit wet weight kgs	1572	3160

* Weights represent a set with standard features. See outline drawing for weights of other configurations


Dimensions	Length	Width	Height
Standard open set dimensions	2656	1100	1658
Enclosed set standard dimensions	3900	1100	2246

Genset outline

Open set

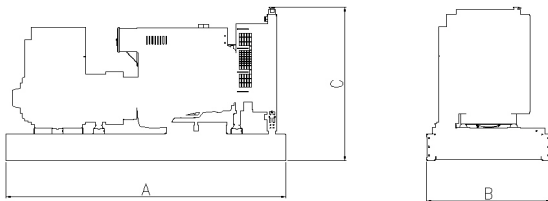

Enclosed set

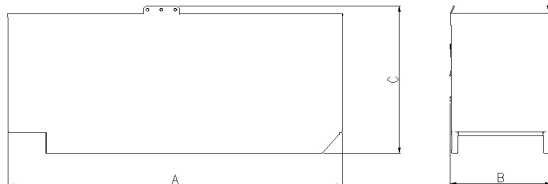

Outlines are for illustrative purposes only. Please refer to the genset outline drawing for an exact representation of this model.

Alternator data

Feature code	Connection ¹	Temp rise degrees C	Duty ²	Alternator	Voltage
B681-2	Wye, 3 Phase	163/125	S/P	UC1274F	380-415V
B726-2	Wye, 3 Phase	125/105	S/P	UC1274G	380-440V
0	0	0	0	0	0
0	0	0	0	0	0
0	0	0	0	0	0
0	0	0	0	0	0

Ratings definitions

Emergency Standby Power (ESP)	Limited-Time running Power (LTP):	Prime Power (PRP)	Base Load (Continuous) Power (COP)
Applicable for supplying power to varying electrical load for the duration of power interruption of a reliable utility source. Emergency Standby Power (ESP) is in accordance with ISO 8528. Fuel Stop power in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514.	Applicable for supplying power to a constant electrical load for limited hours. Limited Time Running Power (LTP) is in accordance with ISO 8528.	Applicable for supplying power to varying electrical load for unlimited hours. Prime Power (PRP) is in accordance with ISO 8528. Ten percent overload capability is available in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514.	Applicable for supplying power continuously to a constant electrical load for unlimited hours. Continuous Power (COP) in accordance with ISO 8528, ISO 3046, AS 2789, DIN 6271 and BS 5514.

Formulas for calculating full load currents:

Three phase output

$$\frac{kW \times 1000}{\text{Voltage} \times 1.73 \times 0.8}$$

Single phase output

$$\frac{kW \times \text{Single Phase Factor} \times 1000}{\text{Voltage}}$$

See your distributor for more information.

Cummins Power Generation
 Manston Park, Columbus Avenue
 Manston, Ramsgate
 Kent CT12 5BF, UK
 Telephone: +44 (0) 1843 255000
 Fax: +44 (0) 1843 255902
 E-Mail: cpg.uk@cummins.com
 Web: www.cumminspower.com

©2009 | Cummins Power Generation Inc. | All rights reserved | Specifications subject to change without notice | Cummins Power Generation and Cummins are registered trademarks of Cummins Inc. PowerCommand and "Our energy working for you." are trademarks of Cummins Power Generation. Other company, product, or service names may be trademarks or service marks of others.

